



MOUNTING BRACKET (80X30X20)

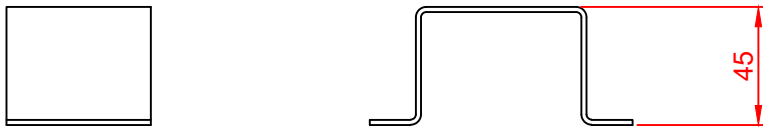

MOUNTING BRACKET (130X30X30)

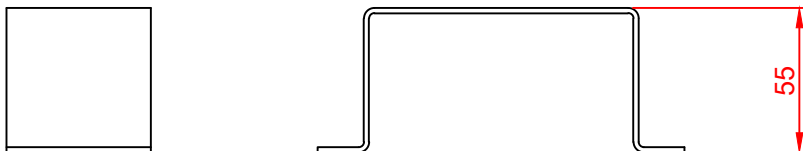

**Description:**

The Apex AE4 Electro-Pneumatic Positioner provides accurate valve positioning for Spring return and Double acting actuators. The compact, lightweight positioner also conforms to Namur VDI/VDE 3845 mounting standards and features a low profile visual position indicator. The modular design allows the addition of a wide range of feedback options including micro switches, inductive switches, gauges and position transmission. The positioner is mounted to the actuator using a NAMUR standard stainless steel mounting bracket.

**Media :**

Clean, dry, oil free air, filtered to 5 microns

**General Specifications :**

- Enclosure Material: Aluminium alloy
- Enclosure Finish: Black epoxy paint
- Enclosure Rating: IP66
- Shaft Material: Stainless steel
- Hysteresis: 0.8% Full Scale
- Linearity: 0.7% Full scale
- Sensitivity: 0.2% Of span
- Air Flow: 271 litres/min @5.5 bar
- Air Consumption: 8.7 litres/min @5.5 bar
- Control Input Signal: 4 - 20mA
- Signal voltage: 6V
- Maximum supply pressure: 150 psi
- Air entry: 1/4"NPT
- Ambient temperature: -20°C - +80°C

**Options:**

- 3-15psi Control
- Pressure gauges
- 4-20mA 2 wire position transmitter
- Mechanical switches
- Inductive switches